PEAKCOLD®

Commercial Refrigerator Series

■ 3 sizes ■ 2 Styles ■







FEATURES

Bottom mounted compressor creates no-stoop lower shelf

Stainless steel exterior and floor, white painted aluminum interior with LED interior lighting

Optional double paned tempered glass door for viewing without opening

PVC coated adjustable wire shelving for better cold circulation, 3 per section

Heavy duty preinstalled casters with brakes

Lockable, self-closing doors stay open at 90°

R290 environmentally friendly hydrocarbon refrigerant

Dixell digital controller with automatic defrost programming

ETL Listed and conforms to NSF Std. 7


Standard 15 amp plug





Model	Doors	Shelves	HP	Amps	Volume	Width	Depth	Height
IM23R	1 solid	3	1/5	2.6	23 Cu. Ft	Ext: 29" Int: 24.4"	Ext: 32.25" Int: 27.2"	Ext: 82.5" Int: 53.5"
IM23RG	1 glass							
IM47R2	2 solid	6	1/4	3.8	47 Cu. Ft	Ext: 54" Int: 49.4"	Ext: 32.25" Int: 27.2"	Ext: 82.5" Int: 53.5"
IM47RG2	2 glass							
IM72R	3 solid	9	3/4	9	72 Cu. Ft	Ext: 81" Int: 76.25"	Ext: 32.25" Int: 27.2"	Ext: 82.5" Int: 53.5"
IM72RG	3 glass							

PEAKCOLD Commercial Upright Refrigerators

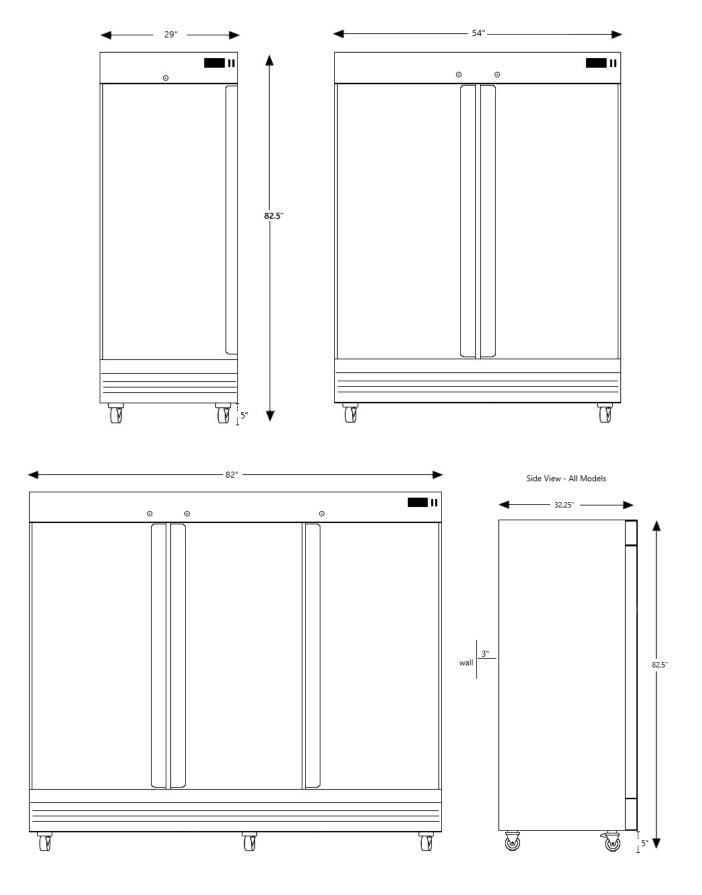



- For warranty service, contact: <u>service@ironmountainrefrigeration.com</u> or call 833-734-8880.
- Warranty is not supported outside the continental United States.
- Warranty is not transferable to other parties.
- Warranty does not cover the loss of product or income due to equipment malfunction.
- Placing the equipment outdoors, using it to store hazardous materials or modifying the equipment in any way voids all warranties.