

2 DOOR DISPLAY COOLER

Energy efficient, eco-friendly HC refrigerant with low charge, spark-free components, and the lowest utility costs in its category.





P-IM21MR2-W

KEY FEATURES

• Eco-Friendly Refrigerant Environmentally friendly hydrocarbon refrigerant has low Global Warming Potential (GWP). Meets all USA & California refrigerant & energy standards.

• Electronic Temperature Controller Patented ETC1H electronic controller assures optimal refrigeration performance through precision temperature control, and intelligent control for defrost cycle, compressor & other component functions.

• High Power Reliable Refrigeration System Fast pull down, optimal internal air circulation and reliable refrigeration, maintaining colder temperatures for food preservation.

• Newly Designed Condenser New condenser featuring a joints reduction down to zero increasing long term refrigeration reliability and safeguarding against any system leaks.


• Standard LED Lighting System Ultra-bright low energy interior LED illumination system provides optimal merchandise display visibility. Low profile, door mounted, clip-in LED design.



2 DOOR DISPLAY COOLER

P-IM21MR2-W

PRODUCT VIEWS

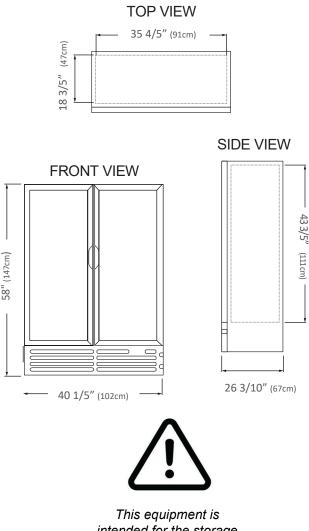

This equipment is intended for the storage and display of bottled or canned products. This display refrigerator is not

for the display of potentially hazardous foods.

Exterior Dimensions				Interior Dimensions			
N:	40	1/5"	147 cm 102 cm 67 cm	W:	35.4	3/5" 1 1/5" 9 3/5" 4	1 cm
Jsa	ble i	nterio	r Capacity	Usa	ble V	olume	
H: 35 4/5" 81 cm		16.7 ft ²					
W: 33 9/10 ^{°°} 86 cm D: 14 2/5 ^{°°} 37 cm		475 lts					
Doo	rs	Door	construction	Shelves		Shelve	s Size
2		Plastic frame		3		N/A N/A	N/A N/A

Internal Material Pre-painted steel

REFRIGERATION PERFORMANCE DATA

Refrigerant	Energy Consumption			
R290 2.3 Oz (0.065 kg)	1.830 kWh/24h			
Compressor Power 1/3 HP	Condenser Finless (low maintenance)			
Thermostat setting default	Cut-Out Cut-In 32°F [0°C] 44.6°F [7°C]			

O ELECTRICAL DATA

Power supply 115V/60 Hz	AMPS 3.3 A	Lighting 230 Lux Output 10 modules 8 LED per module
Plug Type 🛛 🌐	Controller	Cord lenght
NEMA 5-15P	ETC1H	118" (300 cm)

- Warranties are not supported outside the continental United States
- All warranties valid from date of purchase and are not transferable to other parties.
- Warranties do not cover the loss of product or income due to equipment malfunction.
- Placing the equipment outdoors, using it to store hazardous materials or modifying the equipment in any way voids all warranties.

Iron Mountain Refrigeration & Equipment 10550 86th Ave. Suite 101 Pleasant Prairie, WI 53158