

PEAKCOLD

— P L U S + —

2 DOOR DISPLAY COOLER

P-IM26MR2-W

Energy efficient, eco-friendly HC refrigerant with low charge, spark-free components, and the lowest utility costs in its category.



KEY FEATURES

- **Eco-Friendly Refrigerant**
Environmentally friendly hydrocarbon refrigerant has low Global Warming Potential (GWP). Meets all USA & California refrigerant & energy standards.
- **Electronic Temperature Controller**
Patented ETC1H electronic controller assures optimal refrigeration performance through precision temperature control, and intelligent control for defrost cycle, compressor & other component functions.
- **High Power Reliable Refrigeration System**
Fast pull down, optimal internal air circulation and reliable refrigeration, maintaining colder temperatures for food preservation.
- **Newly Designed Condenser**
New condenser featuring a joints reduction down to zero increasing long term refrigeration reliability and safeguarding against any system leaks.
- **Standard LED Lighting System**
Ultra-bright low energy interior LED illumination system provides optimal merchandise display visibility. Low profile, door mounted, clip-in LED design.

ROCK SOLID

WARRANTY

No Headaches
No Registration Required
For PeakCold Plus Line

PEAKCOLD
— PLUS + —

5 YEAR ON COMPRESSORS

3 YEAR ON PARTS


3 YEAR ON LABOR




DOE

PRODUCT VIEWS


TOP VIEW



FRONT VIEW

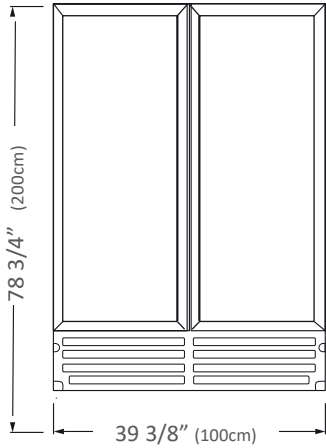

SIDE VIEW

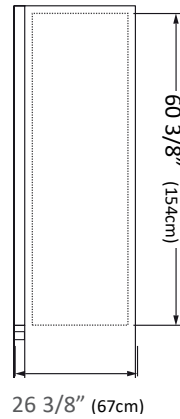

This equipment is intended for the storage and display of bottled or canned products. This display refrigerator is not for the display of potentially hazardous goods.

TECHNICAL SPECIFICATIONS

H: 78 3/4"	200 cm	H: 60 3/8"	154 cm
W: 39 3/8"	100 cm	W: 35 3/8"	90 cm
D: 26 3/8"	67 cm	D: 21 3/4"	55 cm

Usable Interior Capacity

H: 53 7/8"	137 cm	26.1 ft ³ 739.6 lts
W: 30 7/8"	78 cm	
D: 18 7/8"	48 cm	

Doors	Door construction	Shelves	Shelves Size
2	V7 Plastic frame	10	W: 15 7/8" 40 cm D: 19 3/8" 49 cm

External Material Pre-painted steel

Internal Material Pre-painted steel

REFRIGERATION PERFORMANCE DATA

Refrigerant	Energy Consumption	
R290 2.8 Oz (0.080 kg)	2.262 kWh/24h	
Compressor Power	Condenser	
1/3 HP	Finless (low maintenance)	
Thermostat setting default	Cut-Out	Cut-In
	32°F (0°C)	44.6°F (7°C)

ELECTRICAL DATA

Power supply	AMPS	Lighting
115V/60 Hz	7.5 A	155 Lux Output 18 modules 8 LED per module
Plug Type ⚡	Controller	Cord length
NEMA 5-15P	ETC1H	122" (310 cm)

- Warranties are not supported outside the continental United States
- All warranties valid from date of purchase and are not transferable to other parties.
- Warranties do not cover the loss of product or income due to equipment malfunction.
- Placing the equipment outdoors, using it to store hazardous materials or modifying the equipment in any way voids all warranties.