

PEAKCOLD

— P L U S + —

SINGLE DOOR DISPLAY FREEZER

P-IM24MF

Highly efficient, spacious and durable freezer providing perfect temperature and performance.



KEY FEATURES

- **Eco-Friendly Refrigerant**
Environmentally friendly hydrocarbon refrigerant has low Global Warming Potential (GWP). Meets all USA & California refrigerant & energy standards.
- **Digital Temperature Display**
electronic controller assures optimal refrigeration performance through precision temperature control.
- **Electronic Fan Motors**
Enhances performance and efficiency. Uses only a fraction of the energy and offers longer life expectancy.
- **Spark-Free Refrigeration Components**
All models have spark free refrigeration components for optimal safety, per UL requirements.
- **LED Efficiency + 220 LUX**
New 5th generation constant power ultrahigh efficiency LED uses lowest energy possible, with highest output.

ROCK SOLID

WARRANTY

No Headaches
No Registration Required
For PeakCold Plus Line

PEAKCOLD
— P L U S + —

5 YEAR ON COMPRESSORS


3 YEAR ON PARTS

3 YEAR ON LABOR



DOE

PRODUCT VIEWS

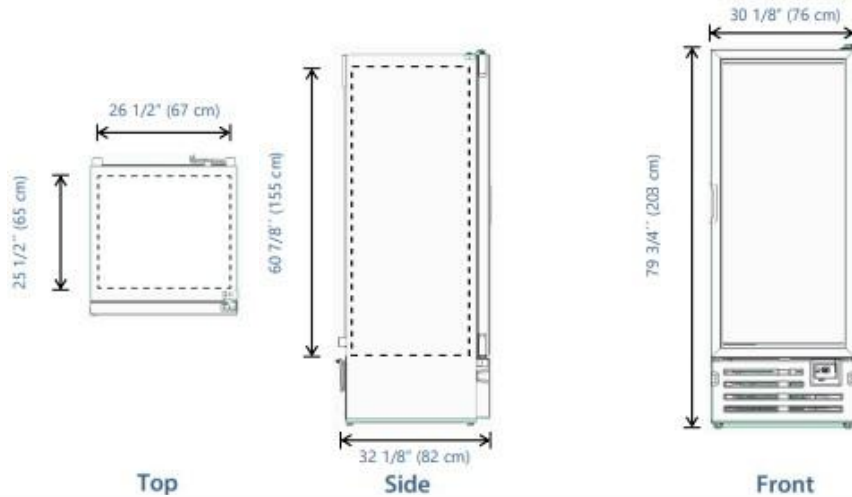

TECHNICAL SPECIFICATIONS					
Exterior Dimensions		Usable Interior Capacity		Material	
H:	79 3/4" (203 cm)	H:	51 1/2" (131 cm)	Curved Plastic Frame	
W:	30 1/8" (76 cm)	W:	25 3/4" (65 cm)	Shelves	4
D:	32 1/8" (82 cm)	D:	20 5/8" (53 cm)	Shelf Size	
Interior Dimensions		Usable Volume		W: 25 3/4" (65 cm)	
H:	60 7/8" (155 cm)	15.9 Ft ³ / 451 L		D: 21 1/4" (54 cm)	
W:	26 1/2" (67 cm)	Doors		Exterior Material	
D:	25 1/2" (65 cm)	1		Pre-painted steel	
				Interior Material	
				Pre-painted steel	

REFRIGERATION PERFORMANCE	ELECTRICAL		LOGISTICS
Refrigerant	Power Supply	Plug Type	Trailer Loads
R290 / 5.3 oz (0.15 kg)	115V/60Hz	NEMA 5-15P	53' : 54'
Compressor Power	Amps		Unit Weight
3/4 HP	7.7 A		373 lb (169 kg)
Thermostat default setting	Controller		Shipping Weight
-11.2°F (-24°C) to -0.4°F (-18°C)	EC		386 lb (175 kg)
Energy Consumption	Lighting		Shipping Dimensions
9.395 kWh/24h	9 modules, 8 LED's per, 157 Lux Output		H: 85 1/4" (217 cm)
Condenser	Cord Length		W: 32 1/2" (83 cm)
Dynamic	122" (310 cm)		D: 33 1/8" (84 cm)



This equipment is intended for the storage and display of bottled or canned products. This display refrigerator is not for the display of potentially hazardous foods.

- Warranties are not supported outside the continental United States
- All warranties valid from date of purchase and are not transferable to other parties.
- Warranties do not cover the loss of product or income due to equipment malfunction.
- Placing the equipment outdoors, using it to store hazardous materials or modifying the equipment in any way voids all warranties.